

country stone

direct web link:
www.tobermore.co.uk/wallingandmasonry

sales & technical line:
028 7964 2411
(for ROI change 028 to 048)

nsPlus F10 18 255

Country Stone ceates the look of natural stone, which is increasingly sought after by home owners and planners. It can be used on its own or can be integrated with other materials such as facing brick or render to give a stunning natural look to any house or building.



Country Stone's aesthetic qualities, cost effectiveness and ease of installation make it an idea option for architects and developers. It also looks superb when used to create dividing walls and other garden features as its rustic appearance blends perfectly with plants and shrubs in garden and landscaping projects.

product specifications

| | |
|-----------------------------|------------------------|
| Manufactured to | BS 6073: Part 1 & 2 |
| Specification to | BS 6073: Part 1 & 2 |
| Product type | Concrete Walling Block |
| Compressive strength | 13Mpa |
| Water absorption | 3.9% |
| Drying shrinkage | 0.049% |
| Density | 2100kg/m ³ |

Tobermore operate an Integrated Management System and is an accredited ISO9001:2000 and ISO14001:2004 company.

colours

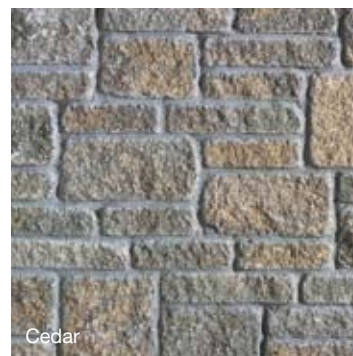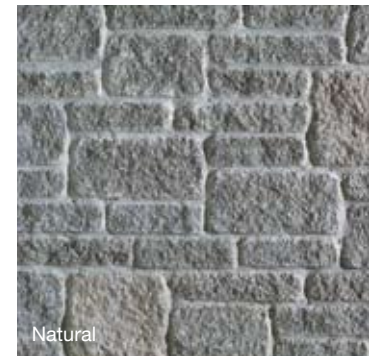

product information

| product | size (mm) | colours available | in stock | m ² per bale | m ² per slice | no. per m ² | no. per bale | weight (kg) per bale | full load 8 wheel | full load 40ft |
|--|-----------------|---|----------|-------------------------|--------------------------|------------------------|--------------|----------------------|-------------------|----------------|
| COUNTRY STONE | 215 x 440 x 105 | Bracken, Natural, Cedar, Slate | YES | 6.80 | 1.70 | 10.57 | 72 | 1600 | 68 | 108.8 |
| | 215 x 215 x 105 | Bracken, Natural, Cedar, Slate | YES | 7.40 | 1.85 | 21.63 | 160 | 1720 | 74 | 111 |
| | 140 x 365 x 105 | Bracken, Natural, Cedar, Slate | YES | 6.60 | 1.32 | 19.56 | 130 | 1600 | 66 | 105.6 |
| | 140 x 290 x 105 | Bracken, Natural, Cedar, Slate | YES | 6.50 | 1.30 | 24.63 | 160 | 1560 | 65 | 104 |
| | 140 x 215 x 105 | Bracken, Natural, Cedar, Slate | YES | 7.20 | 1.20 | 33.22 | 240 | 1740 | 72 | 108 |
| | 65 x 290 x 105 | Bracken, Natural, Cedar, Slate | YES | 6.64 | 0.60 | 53.05 | 352 | 1670 | 66.4 | 106.24 |
| | 65 x 215 x 105 | Bracken, Natural, Cedar, Slate | YES | 6.70 | 0.55 | 71.55 | 480 | 1680 | 67 | 107.2 |
| COUNTRY STONE Single course mixed length pack | 140 x 370 x 105 | Bracken, Natural, Cedar, Slate, Heather | YES | 7.40 | 1.48 | - | - | 1640 | 74 | 118.4 |
| | 140 x 275 x 105 | | | | | | | | | |
| | 140 x 245 x 105 | | | | | | | | | |
| | 140 x 215 x 105 | | | | | | | | | |
| | 140 x 185 x 105 | | | | | | | | | |
| COUNTRY STONE COPING | 300 x 208 x 80 | Bracken, Natural, Cedar, Slate, Heather | YES | - | - | - | 120 | 1380 | 1200 | 2040 |

See instructions and warnings on page 146.

technical information

country stone

All product should be installed in accordance with the latest British Standard.

Country Stone is designed to recreate traditional stone sizes and to co-ordinate with standard cavity wall construction. When Country Stone blocks are used in housing projects a clear cavity must be retained.

All new work must be protected during construction and must be designed and built in accordance with good building practice. Builders familiar with conventional brickwork will find that similar installation principles apply.

Joints can be finished flush or tooled depending on the overall effect required. Raked joints are not recommended. It is vital that all horizontal and vertical joints between Country Stone blocks must be compacted and free from voids. Shell bedding should not be used.

laying patterns


Country Stone blocks are available in a range of sizes which allow them to be laid random, coursed, random brought to course and mixed pack single course.

Any technical information provided by Tobermore in relation to any product (whether before or after order) is provided by way of GUIDANCE ONLY and, to the fullest extent permitted by law, without liability on the part of Tobermore for any loss or damage suffered as a result of relying upon it. Such technical information should not be relied upon in substitution for obtaining independent expert advice prior to using any product from both a suitably qualified engineer and building contractor, in particular, as to the suitability of the product for use at the intended site for the intended scheme.




Country Stone Bracken: (Mixed pack single course)


Random bond

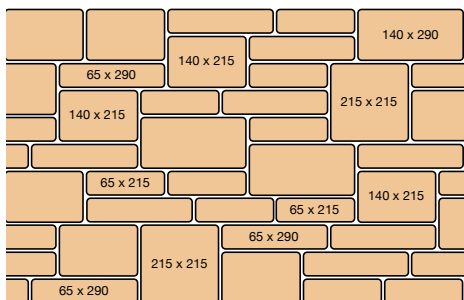


Course bond

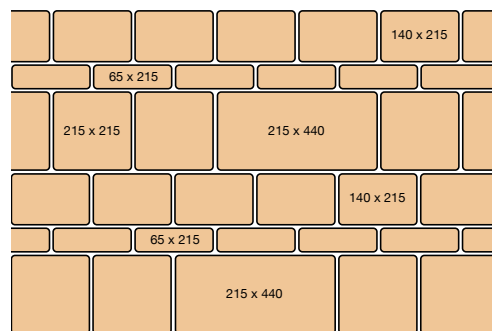

Random brought to course

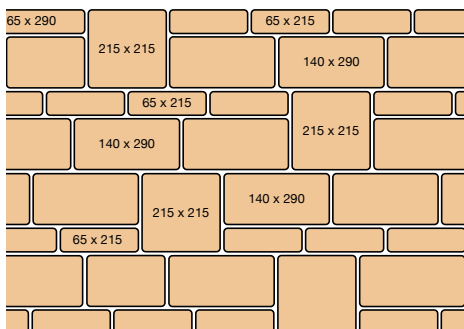

Mixed pack single course

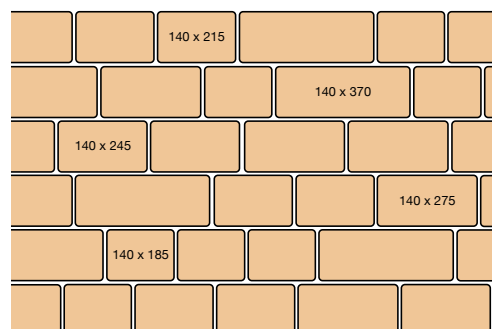

pillars

The Country Stone range is commonly used on pillars, entrances and boundary walls. Pillars can be constructed using any of the patterns shown, however, the most popular finish is when the Country Stone single course mixed length pack is used. The product can be used in conjunction with fencing or gates.

copings & caps


Tobermore supply a specific coping that is suitable for Country Stone. The Country Stone coping is textured on both ends and ensures the wall is capped with an appropriately finished product.




Country Stone Bracken: (Mixed pack single course)



Country Stone Natural: (Mixed pack single course)

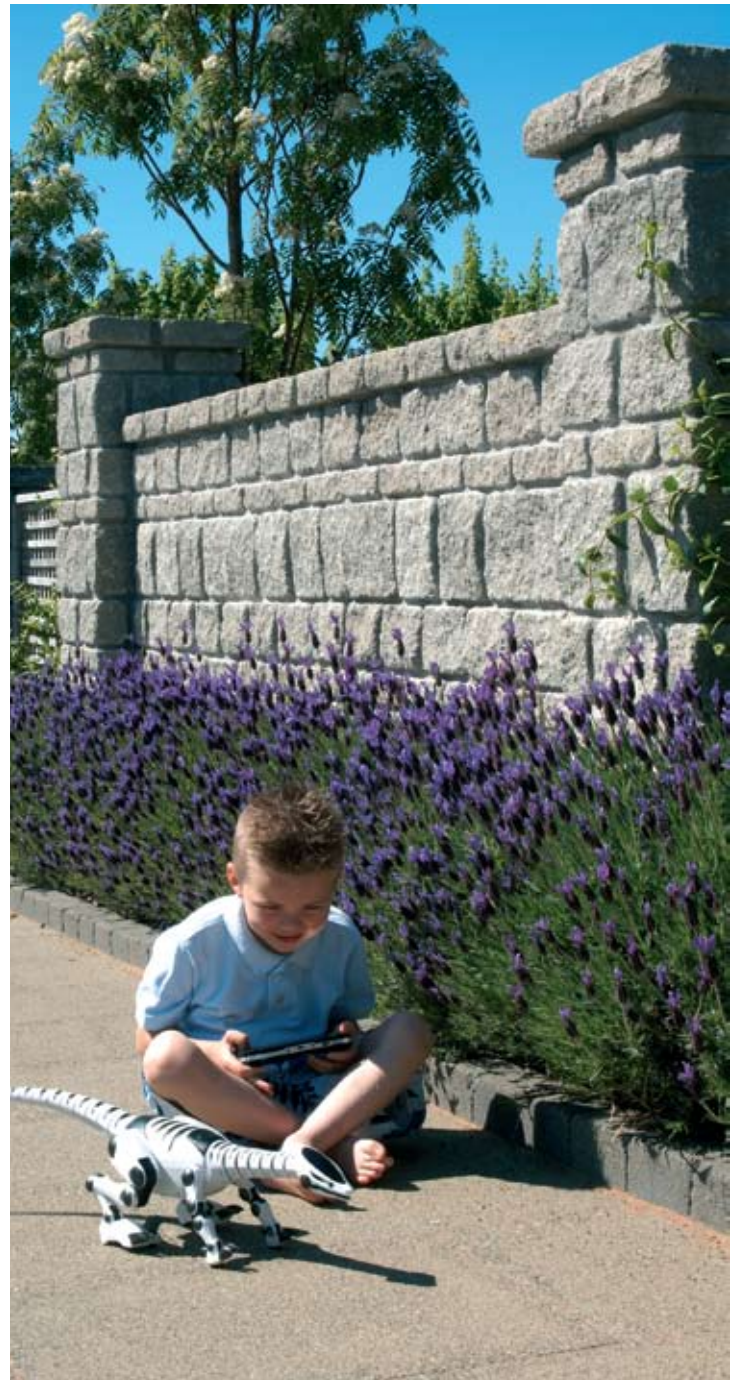

Country Stone Natural: (Random brought to course)

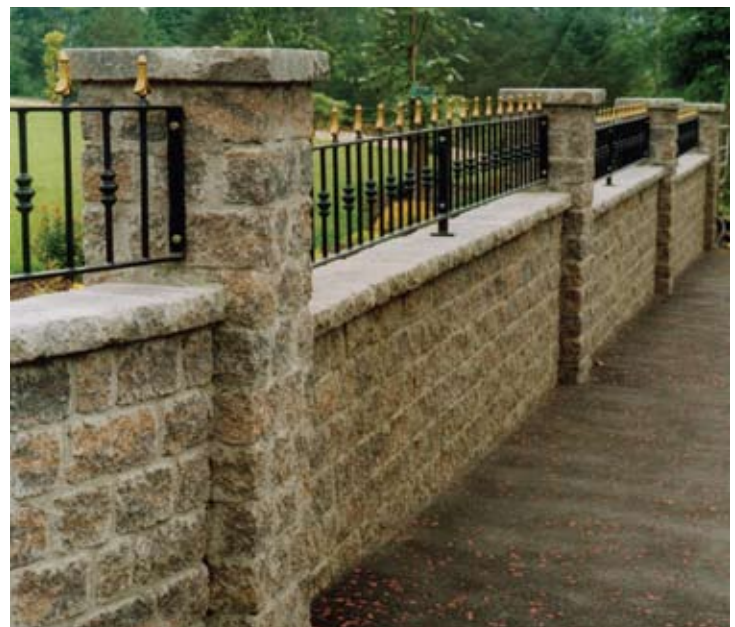

Country Stone Bracken: (Mixed pack single course)