

Ara

Artro Constellation



220 x 50 x 80

Using a 3-way mix of Artro's 'cool' grey palette, Ara is perfect for creating distinctive schemes with contemporary tones.

The stylish finish of the blend offers a unique and modern aesthetic. The mix of the three colours will be sure to add contrast to your next project.



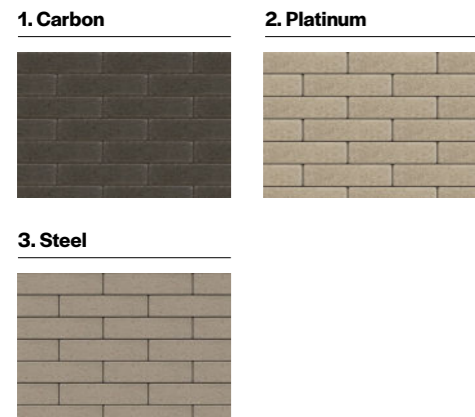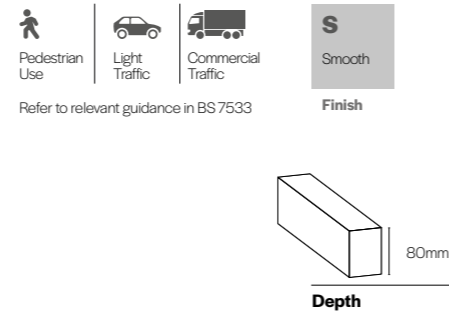

SCAN HERE



Specification

Product type	Concrete Paving Block
Manufactured to	BS EN 1338:2003
Surface Layer	Hard-wearing surface layer with a minimum of 4mm and >350kgs/m ³ cement
Surface Finish	Smooth
Efflorescence	Minimum 12 hour vapour curing to significantly reduce the possibility of efflorescence
Strength	Typical tensile splitting strength of >3.6MPa
Slip/Skid risk	Mean polished skid resistance value (PSRV) >45 Mean unpolished skid resistance value (USRV) >45
Installed to (flexibly)	BS7533-3:2005
ns5	Plus Q24 110 Create 45-20-64/400
Tolerances on Dimensions (mm)	Length ±2mm, width ±2mm, thickness ±3mm
Abrasion Resistance	Class 3
Durability (Freeze-thaw)	Class 3
External Fire Performance	Deemed to satisfy. See Commission Decision 2000/553/EC
Reaction to fire	Class A1
Applications	Refer to the relevant part of BS7533 for the correct sub-base design. Available from www.bsigroup.com
Energy used	100% renewable energy
Water used	100% from our rainwater harvesting system and groundwater bore hole
Recycled content	Not less than 12%
 Carbon Footprint	20.22kgCo ₂ e/m ²
Recyclable	100% of this product can be recycled
Manufacturing & Delivery	From one location within the UK
 Breeam rating www.bre.co.uk	BREEAM – 'B' according to the Green Guide to Specification, 4th Edition 2009. 'A' can be achieved when used in conjunction with a prepared recycled sub-base.
Tobermore products are manufactured in accordance with an accredited ISO 9001:2015 Quality Management. Manufacturing facilities are accredited to ISO14001:2015 Environmental Management. The company publish environmental labels and declarations in accordance with BES 6001.	

product	size (mm)	colours available	in stock	m ² per pack	m ² per slice	no. per m ²	no. per pack	weight kg per pack GB	weight kg per pack NI/ROI
Artro Ara	220x55x80	Platinum, Steel & Carbon Ara Mix	YES	6.776	0.847	82.64	560	1266	1266