

# Pavo

## Manhattan Constellation


600 x 150 x 80

Manhattan Pavo will transform any project into a modern oasis.

The three-way mix of graphite, mid-grey and silver, using this unique linear product will create stunning and unique spaces for any commercial project. This sleek design is sure to impress.



SCAN HERE



Finish



80mm

Depth


1. Silver



2. Mid Grey



3. Graphite



### Specification

<b>Product type</b>	Concrete Paving
<b>Manufactured to</b>	BS EN 1338:2003 & BS EN 1339:2003
<b>Surface Layer</b>	Hard-wearing surface layer with a minimum of 4mm and >350kgs/m <sup>3</sup> cement
<b>Surface Finish</b>	Textured Granite Aggregate
<b>Granite Content</b>	Not less than 53% of granite aggregate in surface layer for Silver, Mid Grey and Graphite; Not less than 45% of granite aggregate in surface layer for Sandstone
<b>Efflorescence</b>	Minimum 12 hour vapour curing to significantly reduce the possibility of efflorescence
<b>Strength</b>	BS EN 1338:2003 Typical tensile splitting strength of >3.6MPa, BS EN 1339:2003 Typical tensile splitting strength of >5MPa (Class 3)
<b>Slip/Skid resistance</b>	Mean polished skid resistance value (PSRV) >45 Mean unpolished skid resistance value (USRV) >45
<b>Installed to</b>	Latest version of BS 7533
<b>Tolerances on Dimensions (mm)</b>	Length ±2mm, width ±2mm, thickness ±3mm
<b>Abrasion Resistance</b>	≤ 23mm (Wide Wheel Abrasion Test) - Class 3
<b>Durability (Freeze-thaw)</b>	≤ 1.0 kg/m <sup>2</sup> as a mean with no individual value >1.5Kg/m <sup>2</sup> - Class 3
<b>External Fire Performance</b>	Deemed to satisfy. See Commission Decision 2000/553/EC
<b>Reaction to fire</b>	Class A1
<b>Applications</b>	<b>600x150x80mm</b> with a correctly designed sub-base is suitable for pedestrians and residential driveways. <b>80mm mixed lengths</b> with a correctly designed sub-base is suitable for occasional commercial vehicles and MEWPs.  Refer to BS 7533:101:2021 for guidance.
<b>Energy used</b>	100% renewable energy
<b>Water used</b>	100% from our rainwater harvesting system and groundwater bore hole
<b>Recycled content</b>	Not less than 6%
<b>Carbon Footprint</b>	23.47kgCO <sub>2</sub> e/m <sup>2</sup>
<b>Manufacturing &amp; Delivery</b>	From one location within the UK
<b>rating</b> www.bre.co.uk	Refer to the Green Guide to Specification, latest edition

Tobermore products are manufactured in accordance with an accredited ISO 9001:2015 Quality Management. Manufacturing facilities are accredited to ISO14001:2015 Environmental Management. The company publish environmental labels and declarations in accordance with BES 6001.

product	size (mm)	colours available	in stock	m <sup>2</sup> per pack	m <sup>2</sup> per slice	no. per m <sup>2</sup>	no. per pack	weight kg per pack GB	weight kg per pack NI/ROI
<b>Manhattan Pavo</b>	600 x 150 x 80	Graphite, Mid Grey & Silver Pavo Mix	YES	9.6	1.6	50	480	1756	1746

#### Contact Us

GB: 0844 800 5736  
NI: 028 7964 2411  
ROI: 048 7964 2411

#### Email

technical@tobermore.co.uk  
sales@tobermore.co.uk

# Pavo

## Manhattan Constellation




Mixed Length x 80

Manhattan Pavo will transform any project into a modern oasis.

The three-way mix of graphite, mid-grey and silver, using this unique linear product will create stunning and unique spaces for any commercial project. This sleek design is sure to impress.



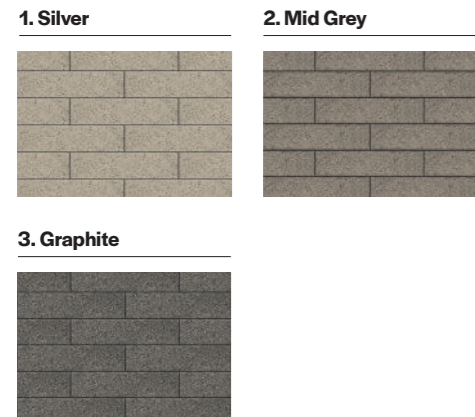

SCAN HERE



### Specification

<b>Product type</b>	Concrete Paving
<b>Manufactured to</b>	BS EN 1338:2003 & BS EN 1339:2003
<b>Surface Layer</b>	Hard-wearing surface layer with a minimum of 4mm and >350kgs/m <sup>3</sup> cement
<b>Surface Finish</b>	Textured Granite Aggregate
<b>Granite Content</b>	Not less than 53% of granite aggregate in surface layer for Silver, Mid Grey and Graphite; Not less than 45% of granite aggregate in surface layer for Sandstone
<b>Efflorescence</b>	Minimum 12 hour vapour curing to significantly reduce the possibility of efflorescence
<b>Strength</b>	BS EN 1338:2003 Typical tensile splitting strength of >3.6MPa, BS EN 1339:2003 Typical tensile splitting strength of >5MPa (Class 3)
<b>Slip/Skid resistance</b>	Mean polished skid resistance value (PSRV) >45 Mean unpolished skid resistance value (USRV) >45
<b>Installed to</b>	Latest version of BS 7533
<b>Tolerances on Dimensions (mm)</b>	Length ±2mm, width ±2mm, thickness ±3mm
<b>Abrasion Resistance</b>	≤ 23mm (Wide Wheel Abrasion Test) - Class 3
<b>Durability (Freeze-thaw)</b>	≤ 1.0 kg/m <sup>2</sup> as a mean with no individual value >1.5Kg/m <sup>2</sup> - Class 3
<b>External Fire Performance</b>	Deemed to satisfy. See Commission Decision 2000/553/EC
<b>Reaction to fire</b>	Class A1
<b>Applications</b>	<b>600x150x80mm</b> with a correctly designed sub-base is suitable for pedestrians and residential driveways. <b>80mm mixed lengths</b> with a correctly designed sub-base is suitable for occasional commercial vehicles and MEWPs. Refer to BS 7533:101:2021 for guidance.
<b>Energy used</b>	100% renewable energy
<b>Water used</b>	100% from our rainwater harvesting system and groundwater bore hole
<b>Recycled content</b>	Not less than 6%
 <b>Carbon Footprint</b>	23.47kgCO <sub>2</sub> e/m <sup>2</sup>
<b>Manufacturing &amp; Delivery</b>	From one location within the UK
 <b>rating</b> www.bre.co.uk	Refer to the Green Guide to Specification, latest edition

Tobermore products are manufactured in accordance with an accredited ISO 9001:2015 Quality Management. Manufacturing facilities are accredited to ISO14001:2015 Environmental Management. The company publish environmental labels and declarations in accordance with BES 6001.

product	size (mm)	colours available	in stock	m <sup>2</sup> per pack	m <sup>2</sup> per slice	no. per m <sup>2</sup>	no. per pack	weight kg per pack GB	weight kg per pack NI/ROI
<b>Manhattan Pavo</b>	Mixed length x 80	Graphite, Mid Grey, Sandstone Silver	YES	9.6	0.96	20.7	200	1765	1755