

# Pedesta

vibrant colours

- Superb hard-wearing smooth surface
- Vibrant long-lasting colours
- Rectangular profile allows the creation of distinctive patterns
- Creates a stunning, smooth look
- Pencil Edge Pedesta also available

Other versions available:



Permeable

## product specifications

<b>Product type</b>	Concrete Paving Block
<b>Manufactured to</b>	BS EN 1338:2003
<b>Surface Layer</b>	Hard wearing surface layer with a minimum of 4mm and >350kg/m <sup>3</sup> cement
<b>Surface Finish</b>	Smooth
<b>Chamfer</b>	Standard or Pencil Edge Chamfer
<b>Efflorescence</b>	Minimum 12 hour vapour curing to significantly reduce the possibility of efflorescence
<b>Strength</b>	Typical tensile splitting strength of >3.6MPa
<b>Slip/Skid risk</b>	Extremely Low
<b>Installed to</b>	BS 7533-3:2005
<b>NSI</b>	<b>Plus:</b> Q24 110 <b>Create:</b> 45-20-64/400
<b>Applications</b>	Refer to the relevant part of BS 7533 for the correct sub-base design and the most suitable product size for your application. Available from <a href="http://www.bsigroup.com">www.bsigroup.com</a>
<b>Energy used</b>	100% renewable energy
<b>Water used</b>	100% from our rainwater harvesting system and groundwater bore hole
<b>Recycled content</b>	Not less than 12%
<b>Carbon Footprint</b>	<b>50mm:</b> 18kgCo <sup>2</sup> e/m <sup>2</sup> <b>60mm:</b> 22kgCo <sup>2</sup> e/m <sup>2</sup> <b>80mm:</b> 30kgCo <sup>2</sup> e/m <sup>2</sup>
<b>Recyclable</b>	100% of this product can be recycled
<b>Manufacturing &amp; Delivery</b>	From one location within the UK
<b>breem rating</b> <a href="http://www.bre.co.uk">www.bre.co.uk</a>	<b>50/60mm:</b> <b>A</b> , according to the Green Guide to Specification, 4 <sup>th</sup> Edition 2009. <b>A+</b> , can be achieved by using a recycled sub-base. <b>80mm:</b> <b>B</b> , in according to the Green Guide to Specification, 4 <sup>th</sup> Edition 2009. <b>A</b> , can be achieved by using a recycled sub-base.



Tobermore products are manufactured in accordance with an accredited ISO 9001:2015 quality system. Manufacturing facilities are accredited to ISO14001:2015 Environmental Management. The company publish environmental labels and declarations in accordance with BS EN ISO 14021:2016 and BES 6001.



FM 11763 EMS 88400



## colours

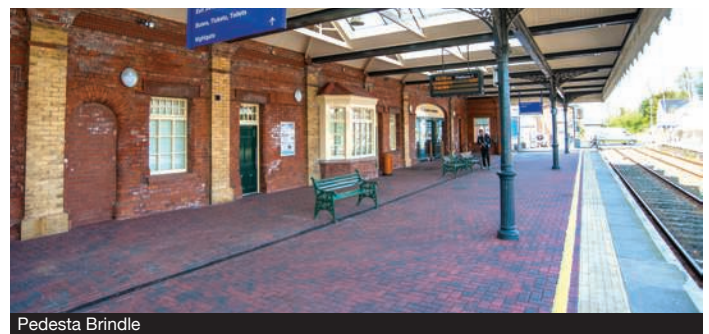

Pedesta Brindle

product	size (mm)	colours available	in stock	m <sup>2</sup> per pack	m <sup>2</sup> per slice	no. per m <sup>2</sup>	no. per pack	weight (kg) per pack
PEDESTA 50mm [void pack]	200 x 100 x 50	Bracken, Brindle, Charcoal, Golden, Heather, Red, Slate	YES	13.76	0.96	50	688	1545
PEDESTA 60mm <b>BIM</b>	200 x 100 x 60	Bracken, Brindle, Charcoal, Heather	YES	13.44	2.24	50	672	1800
PEDESTA 60mm (pencil edge)	200 x 100 x 60	Charcoal, Natural	YES	13.44	2.24	50	672	1800
PEDESTA 80mm <b>BIM</b>	200 x 100 x 80	Bracken, Brindle, Charcoal, Heather	YES	9.6	1.6	50	480	1714
PEDESTA 80mm (pencil edge)	200 x 100 x 80	Charcoal, Natural	YES	9.6	1.6	50	480	1714
		Bracken, Brindle	MADE TO ORDER					

**BIM** This product is available to download from our website in **BIM Level 2** format.

Refer to all instructions and warnings on our website