



SCAN HERE

Braemar

Premium concrete paving with the aesthetic appeal of natural granite.

Manufactured from carefully selected premium aggregates, Braemar is diamond ground to produce two distinct finishes in a block paving size range in a choice of granite colours.

- Cost-effective alternative to natural stone
- Premium block paving
- Manufactured with natural granite aggregates
- Superb hard-wearing granite surface
- Vibrant long-lasting colours
- Creates a striking, contemporary look
- Readily available with much shorter lead times than natural stone


 **PrimeTop**  **Ef-Stop**

GT Ground Textured	G Ground	 Pedestrian Use	 Light Traffic	 Commercial Traffic	 BIM Level 2
------------------------------	--------------------	--	---	--	---


Refer to relevant guidance in BS 7533



200 x 100mm



300 x 200mm



600 x 300mm

Sizes



80mm

Depths





Braemar



Specification

 **PrimeTop**  **Ef-Stop**

Product type	Concrete Paving Block	
Manufactured to	BS EN 1338:2003	300x200x80mm 200X100X80mm
	BS EN 1339:2003	600X300X80mm
Surface Layer	Hard-wearing surface layer with a minimum of 4mm and >390kgs/m ³ cement	
Surface Finish	Ground/Ground Textured	
Granite Content in Surface Layer (Not less than %)	Arran Stone	83.3%
	Alto Silver	63.3%
	Innis Black	53.3%
	Jura Grey	51.3%
	Islay Rose	54.6%
Chamfer	Square Edged	
Efflorescence	Minimum 12 hour vapour curing to significantly reduce the possibility of efflorescence	
Slip/Skid Resistance	Mean polished skid resistance value (PSRV) >45	
	Mean unpolished skid resistance value (USRV) >45	
Installed to	(Externally)	BS 7533-3:2005 200X100X80mm 300X200X80mm
	(Internally)	BS 7533-4:2006 600X300X80mm Details available on request
Tensile Splitting Strength	BS EN 1338:2003	Typical tensile splitting strength of >3.6MPa,
	BS EN 1339:2003	Typical tensile splitting strength of >5MPa (Class 3)
NS	Plus Q24 110	200X100X80mm
	Create 45-20 64/400	300X200X80mm
	Plus Q24 110	600X300X80mm
	Create 45-20 64/395	
Tolerances on Dimensions (mm)	Length ±2mm, width ±2mm, thickness ±3mm	
Abrasion Resistance (mm)	≤ 23mm (Wide Wheel Abrasion Test) Class 3	
Durability (Freeze-thaw)	≤ 1.0 kg/m ² as a mean with no individual value > 1.5 kg/m ² Class 3	
External Fire Performance	Deemed to satisfy when used for roofing	
Reaction to Fire	Class A1	
Applications	Refer to the relevant part of BS 7533 for the correct sub-base design and the most suitable product size for your application. Available from www.bsigroup.com	
Energy used	100% renewable energy	
Water used	100% from our rainwater harvesting system and groundwater bore hole	
Recycled content	Not less than 10%	200X100X80mm 300X200X80mm
	Not less than 6%	600X300X80mm
 Carbon Footprint	EPD Verified (2020) 50.74kgCo ² e/m ² (+7%, - 0.6% depending on specific product)	
Recyclable	100% of this product can be recycled	
Manufacturing & Delivery	From one location within the UK	
 Breeam rating www.bre.co.uk	B , according to the Green Guide to Specification, 4 th Edition 2009. A , can be achieved when used in conjunction with a prepared recycled sub-base.	

Tobermore products are manufactured in accordance with an accredited ISO 9001:2015 Quality Management. Manufacturing facilities are accredited to ISO14001:2015 Environmental Management. The company publish environmental labels and declarations in accordance with BES 6001.

Contact Us

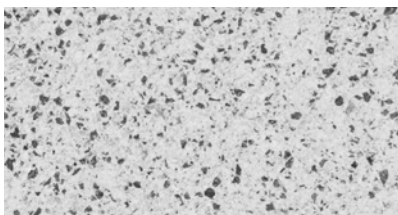
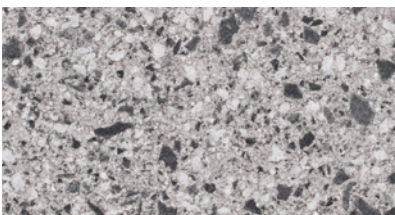
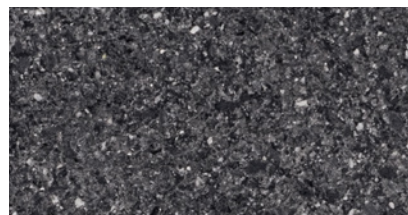
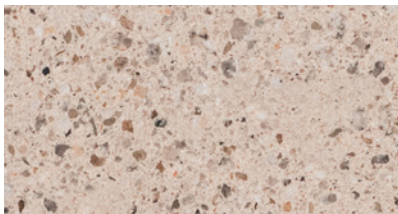
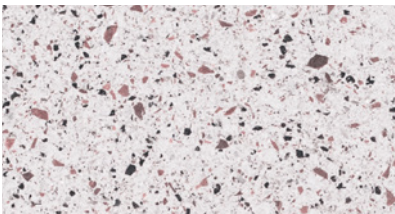
GB: 0844 800 5736
NI: 028 7964 2411
ROI: 048 7964 2411

Email

technical@tobermore.co.uk
sales@tobermore.co.uk

tobermore.co.uk

Braemar


Alto Silver†

Jura Grey†

Innis Black†

Arran Stone†

Islay Rose†


Stock

product	size (mm)	edge	colours available	in stock	m ² per pack	m ² per slice	no. per m ²	no. per pack	weight kg per pack GB	weight kg per pack NI/ROI
Braemar Ground & Ground Textured 80mm BIM	200 x 100 x 80	Square edge	Arran Stone, Alto Silver, Jura Grey, Innis Black, Islay Rose	YES	9.6	1.6	50	480	1756	1746
	300 x 200 x 80	Square edge	Arran Stone, Alto Silver, Jura Grey, Innis Black, Islay Rose	YES	9.6	2.4	16.66	160	1756	1746
	600 x 300 x 80	Square edge	Arran Stone, Alto Silver, Jura Grey, Innis Black, Islay Rose	YES	7.2	3.6	5.55	40	1319	1309

BIM - This product is available to download from our website in BIM Level 2 format.

IMPORTANT INFORMATION

A regular maintenance programme should always be established and active for all public spaces to reduce the risk of slip/skid. Tobermore's stunning ground and ground textured finishes are created using a modern diamond grinding process which achieves a premium finish.

Ground textured provides a higher level of slip resistance. Tobermore recommend that you separate product groups using contrasting bands of colour as each product is manufactured separately and may have slight variations in colour.

Inevitably on light coloured units any contamination caused by vehicle tyres, leaves, beverages / food etc will be more visible compared to darker coloured units. Therefore careful consideration should be applied when specifying colours in specific applications. If light coloured units are specified it must be accepted that these will require more maintenance if the overall appearance is to be maintained.

† **Product Information** - Manufactured with natural granite aggregates

Contact Us

GB: 0844 800 5736
 NI: 028 7964 2411
 ROI: 048 7964 2411

Email

technical@tobermore.co.uk
 sales@tobermore.co.uk

tobermore.co.uk