

Country Stone

SF

Split Face

Rugged stone effect.

Country Stone has a nostalgic appearance, with a rugged finish emulating the distinct aesthetics of natural stone.

- Emulates natural stone
- Vibrant long-lasting colours
- Creates a classic, vintage look

🗾 Ef-Stop


375 x 100 x 140mm	
240 x 100 x 140mm	225 x 100 x 140mm
200 x 100 x 140mm	160 x 100 x 140mm
Sizes (all in one pac	:k)



tobermore.co.uk



Country Stone

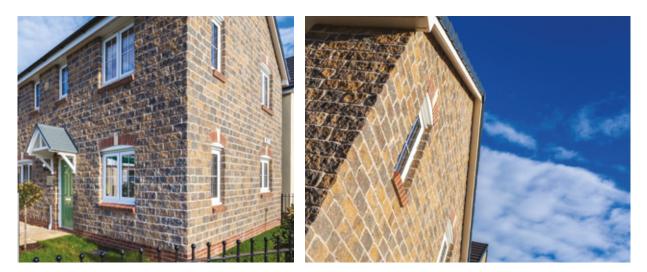

Specification

Specification	🔽 Ef-Stop
Product type	Concrete facing brick
Manufactured to	BS EN 771-3:2011
Efflorescence	Minimum 12 hour vapour curing to significantly reduce the possibility of efflorescence
Mean compressive strength	20N / mm ²
Installed to	Refer to BS 5628-3:2005
Dimensional stability (Moisture movement / shrinkage)	0.9mm / m
Durability	(Freeze/thaw) F2 (severe exposure)
Tolerances	Category D2
Reaction to fire	A1
Water absorption	16.53g /(m² x s)
Water vapour permeability	30/100 µ
Direct Airborne Sound Insulation - Gross density	2020kg / m ³
Shear bond strength	0.15N / mm²
Flexural Bond Strength	NPD
Thermal Resistance (Conductivity)	Protected 1.25W/m K, Exposed 1.43W/m K
Mortars & Expansion Joints	Refer to BS 5628-3:2005
Bed Reinforcement	Refer to BS 5628-3:2005
ՈՏՏ	Plus F10 295 Create 45-80-50/322
Applications	Please refer to Table 15 of PD 6697: 2010. For further details please refer to www.tobermore.co.uk
Energy used	100% renewable energy
Water used	100% from our rainwater harvesting system and groundwater bore hole
Recycled content	Not less than 5%
Carbon footprint	29.17kgs Co ² e/m ²
Recyclable	100% of this product can be recycled
Manufacturing & Delivery	From one location within the UK
breeam rating www.bre.co.uk	A+, according to the Green Guide to Specification, 4th Edition 2009.
Tobermore products are manufactured	in accordance with an accredited ISO 9001-2015 or ality management. Manufacturing facilities are accredited to ISO 14001-2015

Tobermore products are manufactured in accordance with an accredited ISO 9001:2015 quality management. Manufacturing facilities are accredited to ISO 14001:2015 environmental management. The company publish environmental labels and declarations in accordance with BES 6001.

Email

technical@tobermore.co.uk sales@tobermore.co.uk



Country Stone



Stock

product	size (mm)	colours available	in stock	m² per pack	m² per slice	no. per pack	weight kg per pack GB	weight kg per pack NI/ROI
Country Stone (single course mixed length) (all sizes in one pack)	375 x 100 x 140 225 x 100 x 140 160 x 100 x 140 240 x 100 x 140 200 x 100 x 140	Bracken, Heather, Slate	YES	6.72	1.34	40 40 40 40	1560	1560
Country Stone Coping	208 x 300 x 80	Bracken, Heather, Slate	YES	-	-	128	1416	1416

Heather

Bracken



Email technical@tobermore.co.uk sales@tobermore.co.uk