

Historic Flags & Circles



SCAN HERE

Riven stone effect.

Historic Flags, with a neutral, slate-like finish, contain a subtle blend of natural tones and colours. These paving flags complement both modern and period properties.

- Provides the look and feel of traditional natural stone
- Superb hard-wearing surface
- Vibrant long-lasting colours
- Features beautiful fettled edges and a riven face
- Available in a mixed size pack
- Allows fast installation
- An inspiring focal point can be created with a Historic Circle

 **PrimeTop®**  **Ef-Stop®**



Riven

Finish



Pedestrian
Use

Refer to relevant guidance in BS 7533



BIM
Level 2



600 x 450mm



600 x 300mm



450 x 450mm



450 x 300mm



300 x 300mm


Mixed Length Sizes

All sizes in one pack



50mm

Depths

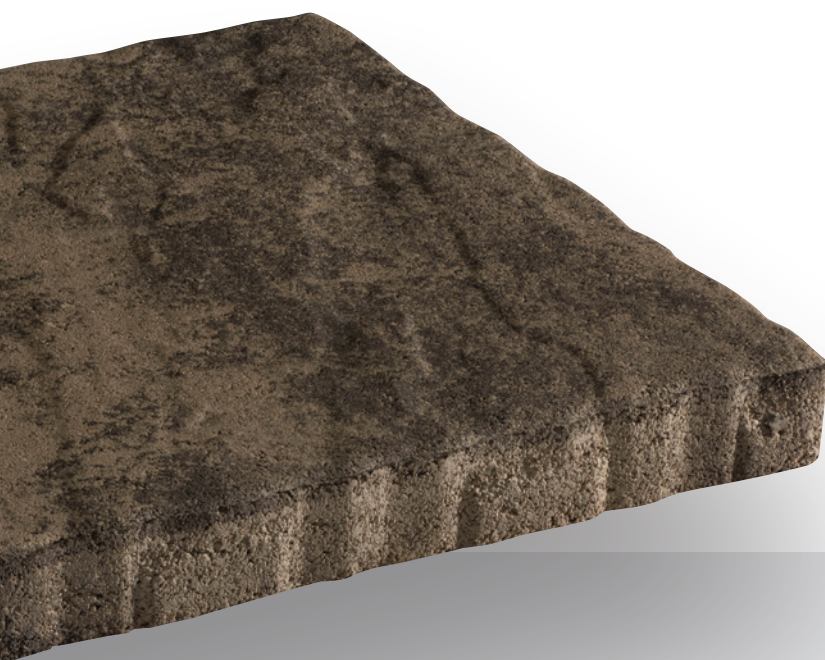



Historic Flags & Circles



Specification

 **PrimeTop®**  **Ef-Stop®**

Product type	Concrete Paving Flag
Manufactured to	BS EN 1339:2003
Surface Layer	Hard-wearing surface layer with a minimum of 4mm and >350kgs/m ³ cement
Chamfer	Fettled
Efflorescence	Minimum 12 hour vapour curing to significantly reduce the possibility of efflorescence
Bending Strength	Typical tensile splitting strength of >5MPa (Class 3)
Slip/Skid Resistance	Mean polished skid resistance value (PSRV) >45 Mean unpolished skid resistance value (USRV) >45
Installed to	BS 7533-4:2006
BS	Plus Q25 315 Create 45-20-64/395
Tolerances on Dimensions (mm)	Length ±2mm, width ±2mm, thickness ±3mm
Abrasion Resistance (mm)	≤ 23mm (Wide Wheel Abrasion Test) Class 3
Durability (Freeze-thaw)	≤ 1.0 kg/m ² as a mean with no individual value > 1.5 kg/m ² Class 3
External Fire Performance	Deemed to satisfy when used for roofing
Reaction to fire	Class A1
Applications	Refer to the relevant part of BS 7533 for the correct sub-base design for your application. Available from www.bsigroup.com
Energy used	100% renewable energy
Water used	100% from our rainwater harvesting system and groundwater bore hole
Recycled content	Not less than 12%
 Carbon Footprint	EPD Verified (2020) 13.61kgCo ₂ e/m ²
Recyclable	100% of this product can be recycled
Manufacturing & Delivery	From one location within the UK
 Breeam rating www.bre.co.uk	A , according to the Green Guide to Specification, 4 th Edition 2009. A+ , can be achieved by using a recycled sub-base.

Tobermore products are manufactured in accordance with an accredited ISO 9001:2015 Quality Management. Manufacturing facilities are accredited to ISO14001:2015 Environmental Management. The company publish environmental labels and declarations in accordance with BES 6001.

Contact Us

GB: 0844 800 5736
NI: 028 7964 2411
ROI: 048 7964 2411

Email

technical@tobermore.co.uk
sales@tobermore.co.uk

tobermore.co.uk

Historic Flags & Circles



Stock

product	size (mm)	edge	colours available	in stock	m ² per pack	m ² per slice	no. per pack	no. per pallet	weight kg per pack GB	weight kg per pack NI/ROI
Historic Flags (all sizes in one pack) BIM	600 x 450 x 50	Fettled	Bracken, Heather, Slate	YES	14.04	1.08	13	78	1596	1596
	600 x 300 x 50						13			
	450 x 450 x 50						26			
	450 x 300 x 50						13			
	300 x 300 x 50						13			
Historic Circle	50mm x 2.24m diameter	Fettled	Bracken, Heather, Slate	YES	3.94	-	25		455	455

BIM - This product is available to download from our website in BIM Level 2 format.

Slate



Bracken



Heather



Contact Us

GB: 0844 800 5736
NI: 028 7964 2411
ROI: 048 7964 2411

Email

technical@tobermore.co.uk
sales@tobermore.co.uk

tobermore.co.uk