

# Lansdowne



SCAN HERE

Rustic effect facing brick.

Lansdowne facing brick is manufactured with a warm and aged feel. Lansdowne bricks are known for their hard-wearing capabilities and exceptional long-lasting colours.

- Tumbled to give an aged, rustic appearance
- Evokes timeless warmth and elegance
- Vibrant long-lasting colours
- Suitable for both modern and period properties

 Ef-Stop®

**A**  
Aged  
Finish



**Charcoal**




**Slate**



**Heather**



**Cottage Red**




**Size**

**Autumn Gold**



**Burren**

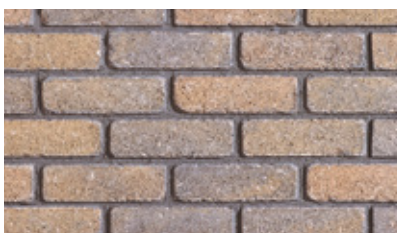

**Meadow Gold**



# Lansdowne



## Specification



<b>Product type</b>	Concrete facing brick
<b>Manufactured to</b>	BS EN 771-3:2011
<b>Manufacturing process</b>	Processed to give aged appearance
<b>Brick type</b>	Perforated (3 holes per brick)
<b>Efflorescence</b>	Minimum 12 hour vapour curing to significantly reduce the possibility of efflorescence
<b>Mean compressive strength</b>	22N / mm <sup>2</sup>
<b>Dimensional stability (Moisture movement / shrinkage)</b>	<0.6mm / m
<b>Weight</b>	2.7kg per brick (average)
<b>Durability</b>	(Freeze/thaw) F2 (severe exposure)
<b>Tolerances</b>	Category D2
<b>Reaction to fire</b>	A1
<b>Water vapour permeability</b>	5/15 μ
<b>Water absorption</b>	2.9g/(m <sup>2</sup> x s)
<b>Soluble salts</b>	S2
<b>Direct Airborne Sound Insulation- Gross density</b>	1900 kg/m <sup>3</sup>
<b>Shear bond strength</b>	0.15N/mm <sup>2</sup>
<b>Flexural Bond Strength</b>	NPD
<b>Thermal Resistance (Conductivity)</b>	Protected 1.59W/m K, Exposed 1.70 W/m K
<b>Mortars &amp; Expansion Joints</b>	Refer to BS 5628-3:2005
<b>Bed Reinforcement</b>	Refer to BS 5628-3:2005
<b>Specials</b>	Range of complementary brick specials are available
<b>Installed to</b>	Refer to BS 5628-3:2005
<b>BS</b>	<b>Plus</b> F10 215 <b>Create</b> 45-80-50/302
<b>Applications</b>	Please refer to Table 15 of PD 6697:2010. For further details please refer to <a href="http://www.tobermore.co.uk">www.tobermore.co.uk</a>
<b>Energy used</b>	100% renewable energy
<b>Water used</b>	100% from our rainwater harvesting system and groundwater bore hole
<b>Recycled content</b>	Not less than 10%
<b>EPD Carbon footprint</b>	0.31kg Co <sub>2</sub> e/unit
<b>Recyclable</b>	100% of this product can be recycled
<b>Manufacturing &amp; Delivery</b>	From one location within the UK
<b>breeam rating</b> <a href="http://www.bre.co.uk">www.bre.co.uk</a>	<b>A+</b> , according to the Green Guide to Specification, 4th Edition 2009.

Tobermore products are manufactured in accordance with an accredited ISO 9001:2015 quality management. Manufacturing facilities are accredited to ISO 14001:2015 environmental management. The company publish environmental labels and declarations in accordance with BES 6001.

## Stock

product	size (mm)	colours available	in stock	no. per pack	no. per slice	weight kg per pack GB	weight kg per pack NI/ROI
<b>Lansdowne</b>	215 x 100 x 65	Autumn Gold, Burren, Charcoal, Cottage Red, Heather, Slate	Yes	480	96	1306	1360

### Contact Us

GB: 0844 800 5736  
 NI: 028 7964 2411  
 ROI: 048 7964 2411

### Email

[technical@tobermore.co.uk](mailto:technical@tobermore.co.uk)  
[sales@tobermore.co.uk](mailto:sales@tobermore.co.uk)

[tobermore.co.uk](http://tobermore.co.uk)