

# Mayfair Step Slabs

with contrasting nosing



SCAN HERE

Granite effect step slabs  
with contrasting nosing.

With a striking granite appearance and hard-wearing surface,  
Mayfair Step Slabs are both stylish and functional.

- Vibrant granite appearance
- Manufactured with natural granite aggregates
- Superb hard-wearing granite surface
- Vibrant long-lasting colours
- Creates a striking, contemporary look
- Slabs and risers

 **PrimeTop**

 **Ef-Stop**


**TGA**

Textured  
Granite Aggregate


Finish



Pedestrian  
Use



600 x 400mm



400 x 400mm

#### Sizes



40mm  
50mm



#### Depths

# Mayfair Step Slabs with contrasting nosing



## Specification

 **PrimeTop**  **Ef-Stop**

<b>Product type</b>	Concrete Paving Slab
<b>Manufactured to</b>	BS EN 1339:2003
<b>Surface Layer</b>	Hard-wearing surface layer with a minimum of 4mm and >390kgs/m <sup>3</sup> cement
<b>Granite Content</b>	Not less than 57% of granite aggregate in surface layer for Silver.
<b>Efflorescence</b>	Minimum 12 hour vapour curing to significantly reduce the possibility of efflorescence
<b>Strength</b>	<b>Less than 50mm deep</b> Typical tensile splitting strength of >3.5MPa <b>50mm or greater</b> Typical tensile splitting strength of >5MPa (Class 3)
<b>Slip/Skid resistance</b>	Mean polished skid resistance value (PSRV) >45, Mean unpolished skid resistance value (USRV) >45
<b>Installed to</b>	BS 7533-4:2006
<b>NSF</b>	<b>Plus</b> Q25 315 <b>Create</b> 45-20-64/395
<b>Tolerances on Dimensions (mm)</b>	Length ±2mm, width ±2mm, thickness ±3mm
<b>Abrasion Resistance</b>	Class 3
<b>Durability (Freeze-thaw)</b>	Class 3
<b>External Fire Performance</b>	Deemed to satisfy, See Commission Decision 2000/553/EC
<b>Reaction to fire</b>	Class A1
<b>Applications</b>	This product should be designed into projects using guidance from the Building Regulations, British Standards and any other relevant documents.
<b>Energy used</b>	100% renewable energy
<b>Water used</b>	100% from our rainwater harvesting system and groundwater bore hole
<b>Recycled content</b>	Not less than 6%
 <b>Carbon Footprint</b>	<b>40mm</b> 16kgCo2e/each <b>50mm</b> 19kgCo2e/each
<b>Recyclable</b>	100% of this product can be recycled
<b>Manufacturing &amp; Delivery</b>	From one location within the UK
 <b>rating</b> www.bre.co.uk	<b>A</b> , according to the Green Guide to Specification, 4 <sup>th</sup> Edition 2009. <b>A+</b> , can be achieved by using a recycled sub-base.

Tobermore products are manufactured in accordance with an accredited ISO 9001:2015 Quality Management. Manufacturing facilities are accredited to ISO14001:2015 Environmental Management. The company publish environmental labels and declarations in accordance with BES 6001.

### Contact Us

GB: 0844 800 5736  
NI: 028 7964 2411  
ROI: 048 7964 2411

### Email

technical@tobermore.co.uk  
sales@tobermore.co.uk

**tobermore.co.uk**

# Mayfair Step Slabs




## Stock

product	size (mm)	finish	edge	colours available	in stock	no. per m <sup>2</sup>	no. per pack	no. per pallet	weight kg per pack GB	weight kg per pack NI/ROI
<b>Mayfair Step Slab</b> with contrasting nosing (edge or corner)	600 x 400 x 50	Granite Textured	Chamfered	Silver Slab with Contrasting Nosing 55mm x 50mm	YES	4.16	20	20	584	584
	400 x 400 x 40			Silver Slab with Contrasting Nosing 55mm x 40mm	YES	6.25	25	100	401	401
<b>Mayfair Step Riser</b>	400 x 170 x 40	Granite Textured	Chamfered	Silver	YES	-	25	100	202	192


Important: Tobermore recommend that compliance is sought from Building Control prior to the installation of any of its step products.

## Product Profile

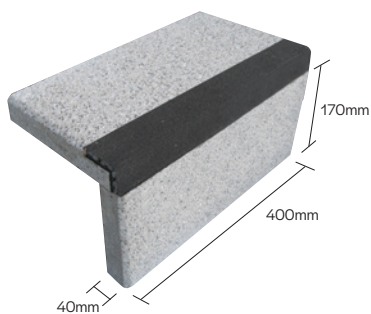

Mayfair Step Riser Silver 400 x 170 x 40mm  
Mayfair Step Slab with contrasting nosing  
**Note:** risers may need to be cut to suit regulations

## Step Example

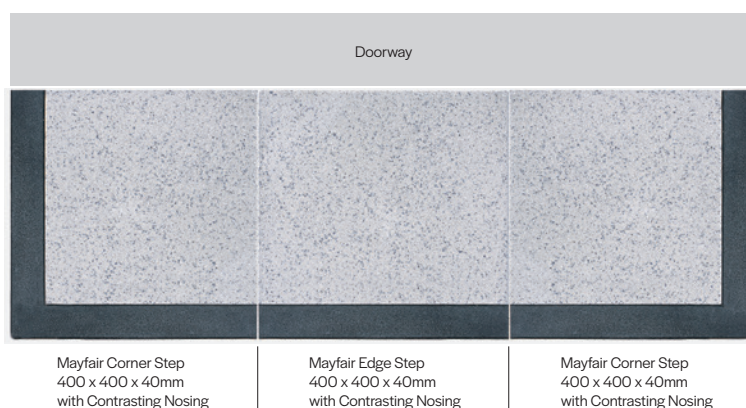

Mayfair Corner Step  
400 x 400 x 40mm  
with Contrasting Nosing

Mayfair Edge Step  
400 x 400 x 40mm  
with Contrasting Nosing

Mayfair Corner Step  
400 x 400 x 40mm  
with Contrasting Nosing

## Contact Us

GB: 0844 800 5736  
NI: 028 7964 2411  
ROI: 048 7964 2411

## Email

technical@tobermore.co.uk  
sales@tobermore.co.uk

[tobermore.co.uk](http://tobermore.co.uk)