

Shannon

Versatile smooth paving.

Shannon's tight joints and chamfered edges make this product a popular choice for pedestrianised areas in addition to trafficked locations. Its smooth surface and range of vibrant long lasting colours allow for design flexibility.

- Vibrant long-lasting colours
- Superb hard-wearing smooth surface
- Pencil chamfer significantly reduces maintenance
- Smooth surface is ideal for use with trolleys, cases etc.

PrimeTop® Ef-Stop®

| | | | | |
|---|--|---|--|--|
|  Smooth |  Permeable |  Pedestrian Use |  Machine Lay |  BIM Level 2 |
| Finish | Also available as | Refer to relevant guidance in BS 7533 | | |



208 x 173mm

Sizes



173 x 173mm

208 x 173mm

Duo Sizes

Both sizes in one pack



50mm

60mm

Depths



Shannon



Specification

 **PrimeTop**®  **Ef-Stop**®

| | |
|---|--|
| Product type | Concrete Paving Block |
| Manufactured to | BS EN 1338:2003 |
| Surface Layer | Hard-wearing surface layer with a minimum of 4mm and >350kgs/m ³ cement |
| Surface Finish | Smooth |
| Chamfer | Pencil Chamfer |
| Efflorescence | Minimum 12 hour vapour curing to significantly reduce the possibility of efflorescence |
| Strength | Typical tensile splitting strength of >3.6MPa |
| Slip/Skid risk | Extremely Low |
| Installed to | BS 7533-3:2005 |
| BS | Plus Q24 110 Create 45-20-64/400 |
| Applications | Refer to the relevant part of BS 7533 for the correct sub-base design and the most suitable product size for your application. Available from www.bsigroup.com |
| Energy used | 100% renewable energy |
| Water used | 100% from our rainwater harvesting system and groundwater bore hole |
| Recycled content | Not less than 12% |
| Carbon Footprint | 50mm 18kgCo ² e/m ² 60mm 22kgCo ² e/m ² |
| Recyclable | 100% of this product can be recycled |
| Manufacturing & Delivery | From one location within the UK |
| Green rating www.bre.co.uk | A , according to the Green Guide to Specification, 4 th Edition 2009. A+ , can be achieved when used in conjunction with a prepared recycled sub-base. |

Tobermore products are manufactured in accordance with an accredited ISO 9001:2015 Quality Management. Manufacturing facilities are accredited to ISO14001:2015 Environmental Management. The company publish environmental labels and declarations in accordance with BES 6001.

Contact Us

GB: 0844 800 5736
NI: 028 7964 2411
ROI: 048 7964 2411

Email

technical@tobermore.co.uk
sales@tobermore.co.uk

tobermore.co.uk

Shannon




Stock


| product | size (mm) | colours available | in stock | m ² per pack | m ² per slice | no. per m ² | no. per pack | weight kg per pack GB | weight kg per pack NI/ROI |
|--|----------------------------------|---|----------|-------------------------|--------------------------|------------------------|--------------|-----------------------|---------------------------|
| Shannon 50mm | 208 x 173 x 50 | Bracken, Brindle, Charcoal, Heather, Natural, Slate | YES | 14.04 | 2.34 | 27.79 | 390 | 1628 | 1628 |
| Shannon Duo 50mm (both sizes in one pack) ML | 208 x 173 x 50 173 x 173 x 50 | Bracken, Charcoal, Heather, Slate | YES | 13.86 | 0.99 | 30.3 | 210 210 | 1617 | 1607 |
| Shannon 60mm | 208 x 173 x 60 | Bracken, Charcoal, Heather | YES | 12.96 | 2.16 | 27.79 | 360 | 1792 | 1782 |

ML - This product can be hand or machine laid.


Heather

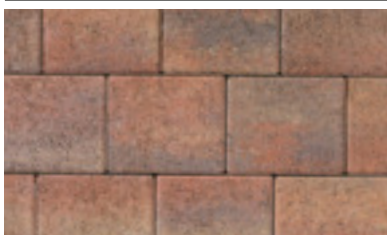

Bracken

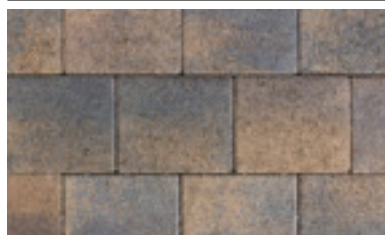

Brindle

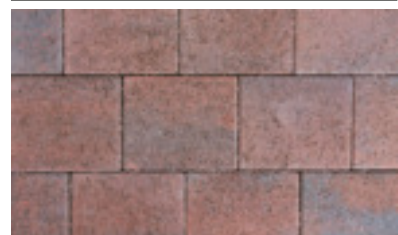

Slate



Natural



Charcoal



Contact Us

GB: 0844 800 5736
NI: 028 7964 2411
ROI: 048 7964 2411

Email

technical@tobermore.co.uk
sales@tobermore.co.uk

tobermore.co.uk