






Standard Flags


Simple & stylish.

Standard Flags have a stylish, simple look. A variety of shades and size options, Standard Flags have the flexibility to blend with contemporary and traditional developments.

- Superb hard-wearing surface
- Vibrant long-lasting colours
- Cost-effective alternative

 PrimeTop®  Ef-Stop®

NS Non-Slip	PNS Patio Non-Slip	NSS Non-Slip Smooth	 Permeable	 Pedestrian Use	 Light Traffic	 Commercial Traffic	 BIM Level 2
Finish			Also available as	Refer to relevant guidance in BS 7533			



600 x 600mm



450 x 450mm



400 x 400mm

Sizes



- 35mm
- 40mm
- 50mm

Depths

Standard Flags



Specification




Product type	Concrete Paving Flag
Manufactured to	BS EN 1339:2003
Surface Layer	Hard-wearing surface layer with a minimum of 4mm and >390kgs/m ³ cement
Efflorescence	Minimum 12 hour vapour curing to significantly reduce the possibility of efflorescence
Strength	Less than 50mm deep Typical tensile splitting strength of >3.5MPa 50mm or greater Typical tensile splitting strength of >5MPa (Class 3)
Slip/Skid risk	Extremely Low
Installed to	BS 7533-4:2006
BS5	Plus Q25 315 Create 45-20-64/395
Applications	Refer to the relevant part of BS 7533 for the correct sub-base design and the most suitable product size for your application. Available from www.bsigroup.com
Energy used	100% renewable energy
Water used	100% from our rainwater harvesting system and groundwater bore hole
Recycled content	Not less than 5%
Carbon Footprint	600x600x50mm 22kgCo ₂ e/m ² 600x600x40mm 16kgCo ₂ e/m ² 450x450x50mm 22kgCo ₂ e/m ² 450x450x35mm 15kgCo ₂ e/m ² (Buff: 16kgCo ₂ e/m ²) 400x400x50mm 22kgCo ₂ e/m ² 400x400x40mm 18kgCo ₂ e/m ²
Recyclable	100% of this product can be recycled
Manufacturing & Delivery	From one location within the UK
breeam rating www.bre.co.uk	A , according to the Green Guide to Specification, 4 th Edition 2009. A+ , can be achieved by using a recycled sub-base.

Tobermore products are manufactured in accordance with an accredited ISO 9001:2015 Quality Management. Manufacturing facilities are accredited to ISO14001:2015 Environmental Management. The company publish environmental labels and declarations in accordance with BES 6001.

Contact Us

GB: 0844 800 5736
NI: 028 7964 2411
ROI: 048 7964 2411

Email

technical@tobermore.co.uk
sales@tobermore.co.uk

tobermore.co.uk


Standard Flags



Natural



Charcoal

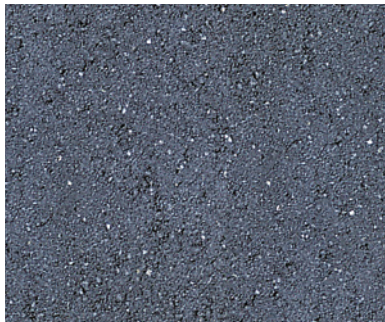

Buff



Golden



Stock

product	size (mm)	finish	edge	colours available	in stock	no. per m ²	no. per pack	no. per pallet	weight kg per pack GB	weight kg per pack NI/ROI
Standard Flags BIM	600 x 600 x 50	Patio Non-Slip	Chamfered	Charcoal, Natural	YES	2.78	20	20	850	842
	600 x 600 x 40	Patio Non-Slip	Chamfered	Buff, Charcoal, Natural	YES	2.78	24	24	848	840
	450 x 450 x 50	Patio Non-Slip	Chamfered	Buff, Charcoal, Natural	YES	4.94	20	80	474	470
	450 x 450 x 35	Non-Slip	Chamfered	Buff, Charcoal, Natural	YES	4.94	30	120	515	511
	400 x 400 x 50	Non-Slip Smooth	Chamfered	Charcoal	YES	6.25	20	80	392	390
	400 x 400 x 40	Non-Slip Smooth	Chamfered	Buff, Charcoal, Golden, Natural	YES	6.25	25	100	403	400

BIM - This product is available to download from our website in BIM Level 2 format.

Contact Us

GB: 0844 800 5736
NI: 028 7964 2411
ROI: 048 7964 2411

Email

technical@tobermore.co.uk
sales@tobermore.co.uk