

# Stanza Slabs



SCAN HERE

Create standout public spaces.

Tobermore's Stanza slabs are ideal for commercial customers – from local authorities to housebuilders – who want to create the impression of space. The linear profile of this striking slab creates a lengthening and widening effect, giving your public projects a sense of scale.

- Smooth, linear paving slabs
- Perfect for contemporary public realm projects
- Available in our long-lasting Slate colour



450 x 225mm

**Sizes**



50mm

**Depths**

 **PrimeTop**

**R**  
Riven  
**Finish**



Refer to relevant guidance in BS 7533



# Stanza Slabs



## Specification



<b>Product type</b>	Concrete Paving Slab
<b>Manufactured to</b>	BS EN 1339:2003
<b>Surface Layer</b>	Hard-wearing surface layer with a minimum of 4mm and >350kgs/m <sup>3</sup> cement
<b>Chamfer</b>	Fettled
<b>Efflorescence</b>	Minimum 12 hour vapour curing to significantly reduce the possibility of efflorescence
<b>Bending Strength</b>	Typical tensile splitting strength of >5MPa (Class 3)
<b>Slip/Skid Resistance</b>	Mean polished skid resistance value (PSRV) >45 Mean unpolished skid resistance value (USRV) >45
<b>Installed to</b>	BS 7533-102:2025
<b>Tolerances on Dimensions (mm)</b>	Length ±2mm, width ±2mm, thickness ±3mm
<b>Abrasion Resistance (mm)</b>	≤ 23mm (Wide Wheel Abrasion Test) Class 3
<b>Durability (Freeze-thaw)</b>	≤ 1.0 kg/m <sup>2</sup> as a mean with no individual value > 1.5 kg/m <sup>2</sup> Class 3
<b>External Fire Performance</b>	Deemed to satisfy when used for roofing
<b>Reaction to fire</b>	Class A1
<b>Applications</b>	Refer to the relevant part of BS 7533 for the correct sub-base design for your application. Available from <a href="http://www.bsigroup.com">www.bsigroup.com</a>
<b>Energy used</b>	100% renewable energy
<b>Water used</b>	100% from our rainwater harvesting system and groundwater bore hole
<b>Recycled content</b>	Not less than 12%
<b>Recyclable</b>	100% of this product can be recycled
<b>Manufacturing &amp; Delivery</b>	From one location within the UK
<b>breem rating</b> <a href="http://www.bre.co.uk">www.bre.co.uk</a>	<b>A</b> , according to the Green Guide to Specification, 4 <sup>th</sup> Edition 2009. <b>A+</b> , can be achieved by using a recycled sub-base.

Tobermore products are manufactured in accordance with an accredited ISO 9001:2015 Quality Management. Manufacturing facilities are accredited to ISO14001:2015 Environmental Management. The company publish environmental labels and declarations in accordance with BES 6001.

### Contact Us

GB: 0844 800 5736  
NI: 028 7964 2411  
ROI: 048 7964 2411

### Email

[technical@tobermore.co.uk](mailto:technical@tobermore.co.uk)  
[sales@tobermore.co.uk](mailto:sales@tobermore.co.uk)

[tobermore.co.uk](http://tobermore.co.uk)

v1.2


# Stanza Slabs



## Stock

product	size (mm)	finish	edge	colours available	in stock	no. per m <sup>2</sup>	no. per pack	no. per pallet	weight kg per pack GB	weight kg per pack NI/ROI
<b>Stanza Slabs</b>	450 x 225 x 50	Smooth	Chamfered	Slate	YES	9.8	130	130	1526	1526

## Slate

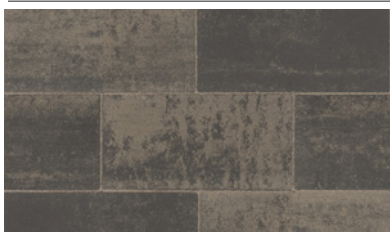

### Contact Us

GB: 0844 800 5736  
 NI: 028 7964 2411  
 ROI: 048 7964 2411

### Email

technical@tobermore.co.uk  
 sales@tobermore.co.uk