


# Toberloc

Heavy duty paving for the toughest environments.

Toberloc is a heavy-duty paving block designed for heavy loads in industrial environments. Available in three colour options, ideal for colour marking of traffic and parking zones.

- Interlocking shape helps stability under heavy loads
- Maximum resistance to rutting and lateral forces
- Performs significantly better than 200x100mm paving
- Easy to lay with machines, thus reducing costs
- Superb hard-wearing smooth surface



225 x 225mm

## Sizes



80mm

## Depths

 **PrimeTop**
 **Ef-Stop**



**Finish**



Pedestrian  
Use



Light  
Traffic



Commercial  
Traffic



Machine  
Lay

Refer to relevant guidance in BS 7533



# Toberloc



## Specification

 **PrimeTop®**  **Ef-Stop®**

<b>Product type</b>	Concrete Paving Block
<b>Manufactured to</b>	BS EN 1338:2003
<b>Surface Layer</b>	Hard-wearing surface layer with a minimum of 4mm and >350kgs/m <sup>3</sup> cement
<b>Surface Finish</b>	Smooth
<b>Efflorescence</b>	Minimum 12 hour vapour curing to significantly reduce the possibility of efflorescence
<b>Strength</b>	Typical tensile splitting strength of >3.6MPa
<b>Slip/Skid risk</b>	Extremely Low
<b>Installed to</b>	BS 7533-3:2005
<b>NS</b>	<b>Plus</b> Q24 110 <b>Create</b> 45-20-64/400
<b>Applications</b>	Refer to the relevant part of BS 7533 for the correct sub-base design for your application. Available from <a href="http://www.bsigroup.com">www.bsigroup.com</a>
<b>Energy used</b>	100% renewable energy
<b>Water used</b>	100% from our rainwater harvesting system and groundwater bore hole
<b>Recycled content</b>	Not less than 11%
<b>Carbon Footprint</b>	32kgCo <sup>2</sup> e/m <sup>2</sup>
<b>Recyclable</b>	100% of this product can be recycled
<b>Manufacturing &amp; Delivery</b>	From one location within the UK
<b>breeam rating</b> <a href="http://www.bre.co.uk">www.bre.co.uk</a>	<b>B</b> , according to the Green Guide to Specification, 4 <sup>th</sup> Edition 2009. <b>A</b> , can be achieved by using a recycled sub-base.


Tobermore products are manufactured in accordance with an accredited ISO 9001:2015 Quality Management. Manufacturing facilities are accredited to ISO14001:2015 Environmental Management. The company publish environmental labels and declarations in accordance with BES 6001.

## Stock


product	size (mm)	chamfer	colours available	in stock	m <sup>2</sup> per pack	m <sup>2</sup> per slice	no. per m <sup>2</sup>	no. per pack	weight kg per pack GB	weight kg per pack NI/ROI
<b>Toberloc</b> ML	225x225x80	Fine	Brindle, Charcoal, Natural	SO	8.9	0.89	26.33	234	1572	1562

ML - This product can be hand or machine laid.

### Natural

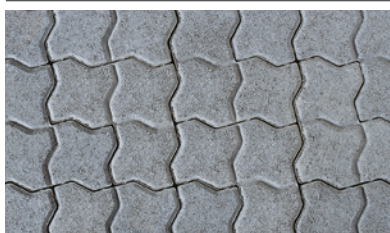

### Charcoal

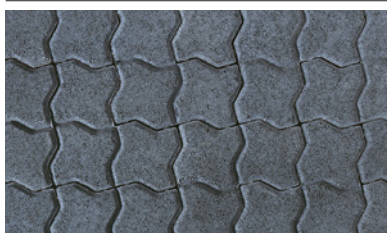

### Brindle



### Contact Us

GB: 0844 800 5736  
NI: 028 7964 2411  
ROI: 048 7964 2411

### Email

[technical@tobermore.co.uk](mailto:technical@tobermore.co.uk)  
[sales@tobermore.co.uk](mailto:sales@tobermore.co.uk)

[tobermore.co.uk](http://tobermore.co.uk)