


Kingston



SCAN HERE

Versatile, smooth facing brick.

The sophisticated Kingston Facing Bricks, are manufactured with a smooth vibrant finish. With eight colour options, ranging from vivid red and gold tones to understated grey and stone shades, Kingston is suitable for any type of application.



Size

- Manufactured with a smooth, sophisticated surface
- Vibrant long-lasting colours
- Suitable for both modern or period properties



S
Smooth
Finish



Autumn Gold



Burren



Moorland



Cottage Red




Warm Red



Charcoal



Slate

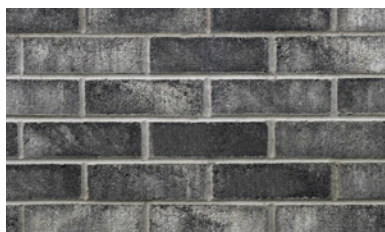

Multi Buff



Kingston



Specification

Product type	Concrete facing brick
Manufactured to	BS EN 771-3:2011
Brick type	Perforated (3 holes per brick)
Efflorescence	Minimum 12 hour vapour curing to significantly reduce the possibility of efflorescence
Mean compressive strength	22N / mm ²
Dimensional stability (Moisture movement / shrinkage)	<0.6mm / m
Weight	2.7kg per brick (average)
Durability	(Freeze / thaw) F2 (severe exposure)
Tolerances	Category D2
Reaction to fire	A1
Water vapour permeability	5 / 15 μ
Water absorption	3.7g / (m ² x s)
Soluble salts	S2
Direct Airborne Sound Insulation- Gross density	1900 kg/m ³
Shear bond strength	0.15N / mm ²
Flexural Bond Strength	NPD
Thermal Resistance (Conductivity)	Protected 1.59W / m K, Exposed 1.70 W / m K
Mortars & Expansion Joints	Refer to BS 5628-3:2005
Bed Reinforcement	Refer to BS 5628-3:2005
Specials	Solid End Block/ Brick closer available
Installed to	Refer to BS 5628-3:2005
BS	Plus F10 215 Create 45-80-50/302
Applications	Please refer to Table 15 of PD 6697:2010. For further details please refer to www.tobermore.co.uk
Energy used	100% renewable energy
Water used	100% from our rainwater harvesting system and groundwater bore hole
Recycled content	Not less than 8%
EPD Carbon footprint	0.31kg Co ₂ e / unit
Recyclable	100% of this product can be recycled
Manufacturing & Delivery	From one location within the UK
brecom rating www.bre.co.uk	A+ , according to the Green Guide to Specification, 4th Edition 2009.

Tobermore products are manufactured in accordance with an accredited ISO 9001:2015 quality management. Manufacturing facilities are accredited to ISO 14001:2015 environmental management. The company publish environmental labels and declarations in accordance with BES 6001.

Stock

product	size (mm)	colours available	in stock	no. per pack	no. per slice	weight kg per pack GB	weight kg per pack NI/ROI
Kingston BIM	215 x 100 x 65	Autumn Gold, Burren, Charcoal, Cottage Red, Moorland, Multi Buff, Slate, Warm Red	YES	440	44	1198	1198

BIM - This product is available to download from our website in BIM Level 2 format.

Contact Us

GB: 0844 800 5736
 NI: 028 7964 2411
 ROI: 048 7964 2411

Email

technical@tobermore.co.uk
sales@tobermore.co.uk

tobermore.co.uk

v1.0